




## Dual Path SmartCom for Texecom Cloud & Texecom Connect (V2)

Texecom's SmartCom 4G adds new connectivity options for Premier Elite systems improving connection reliability. Providing access to Texecom Cloud and Texecom Connect (V2) services via single path (4G) or dual path (4G plus ethernet or WiFi), the SmartCom 4G is always on, always ready, and always available.

The SmartCom 4G includes a host of high performance features:

- **Global roaming SIM automatically connecting with over 42 world-wide network operators providing a simplified network selection**
- **Embedded eSIM chip ensures SIM security as it cannot be removed or stolen enabling the SmartCom 4G to always be connected**
- **Cellular communications provided in partnership with Telefonica and ASL Holdings, experts in safety-critical signalling solutions for the most robust connectivity**
- **Simple setup and configuration using Texecom Cloud saving you time and money**

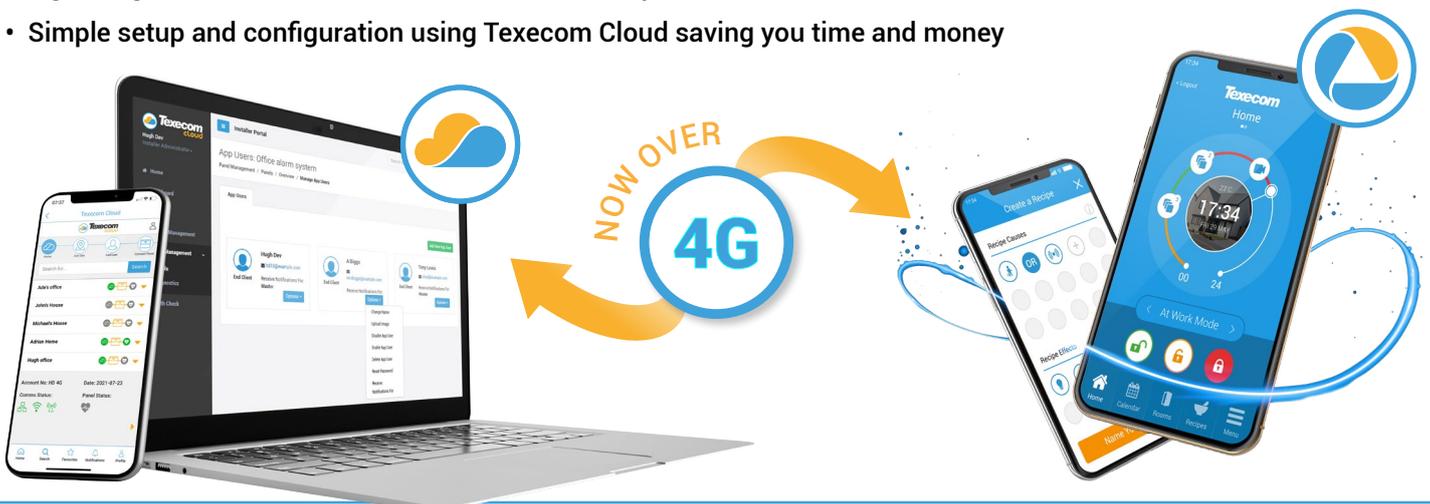

## Key application benefits include:

### Single path 4G can be used without any additional network infrastructure

- Perfect for new commercial installations where IT networks are not yet operational
- Completely wire-free installations are perfect for remote sites or outbuildings, or where there are no local internet options available

### Dual path 4G plus ethernet or WiFi provides best of both worlds

- 4G backup provides continuity in the event of power failure, local network availability or ISP issues





## Standards & Specifications

Alarm System	Grade 3 Class II EN50131-1
Product Type	CELA0050-2
Ethernet	10/100 Base-T, 100 Base-TX
WiFi Module	2.4Ghz IEE802.11 (b/g/n)
WiFi Max. RF Power	15 dbm - internal antenna
Operating Voltage	8 - 15V dc
Typical Current	150mA
Peak Current	220mA
Interconnection Type	Interconnection between device and CIE is proprietary and can only be used with a Texecom CIE
Relative Humidity	0 - 95% non-condensing
<b>4G Module</b>	
LTE Cat 1 Region/Operator	EMEA
LTE FDD	B1/B3/B7/B8/B20/B28A



## Dimensions & Weight

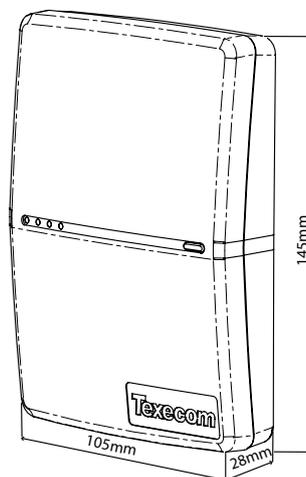

0°C to +40°C



165g approx.